

INSTALLATION INSTRUCTIONS

FPE-2022-75 August, 2022

PRODUCT: TURBOCHARGER OIL FEED LINE FOR 2001-2016 6.6L DURAMAX

FITMENT: 2001-2016 6.6L Duramax equipped Chevy/GMC trucks with factory style turbochargers

KIT P/N: FPE-DTFL-0116

KIT CONTENTS:

Item	Description	Qty
1	Remote oil feed line	1
2	12mm plug	1
3	16mm plug	1
4	Banjo bolt and sealing washers	1
5	Block adapter fitting w/ sealing ring	1
6	Zip ties	3



WARNINGS:

- User assumes sole responsibility for the safe & proper use of the vehicle at all times.
- The purchaser and end user releases, indemnifies, discharges, and holds harmless Fleece Performance Engineering, Inc. from any and all claims, damages, causes of action, injuries, or expenses resulting from or relating to the use or installation of this product that is in violation of the terms and conditions on this page, the product disclaimer, and/or the product installation instructions. Fleece Performance Engineering, Inc. will not be liable for any direct, indirect, consequential, exemplary, punitive, statutory, or incidental damages or fines cause by the use or installation of this product.



2001 - 2010 (LB7, LLY, LBZ, LMM) APPLICATIONS

Use the supplied M12 plug to block the OE turbocharger oil feed port.


For reference, the turbocharger pedestal mounting locations are circled in red.



2011-2016 (LML) APPLICATIONS

Use the supplied M16 plug to block the OE turbocharger oil feed port.

For reference, the turbocharger pedestal mounting locations are circled in red.

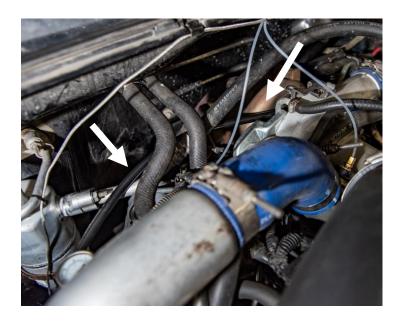

OIL FEED ROUTING

Route the feed line towards the passenger side of the engine away from any rotating components and secure it with zip ties. Install the banjo bolt and two copper sealing washers into the turbo oil feed port.



OIL FEED RELOCATION

Remove the rifle plug on the front-passenger side of the engine and install the adapter fitting and sealing washer included in the kit.